Features

- Flicker free
- High performance
- IP20
- Suitable for Class II light fixtures
- 5-year warranty (please refer to the warranty condition)



🔝 🚇 张 CECB 塔 💩 🔍

Applications

Commercial lighting · indoor office lighting · decorative lighting · residential lighting

Descriptions

LF-GIF030YSxxxxH is a 30W isolated constant current LED driver. Its input voltage ranges from 220 to 240Vac; output voltage from 33 to 40V and output current from 550 to 750mA. It is suitable for Class II light fixtures, including panel light, down light, spot light, etc.

Product Model

| LF - GIF 030 | YS xxxx H | |
|--------------|-----------|--|
| | | H: input voltage: 220-240Vac |
| | | • xxxx: output current (e.g. 0750: 750mA) |
| | 2 | Y: complies with certifications; S: serial number |
| | | • 030: output power: 30W |
| | | G: isolated design; IF: indoor flicker-free LED driver |
| | | |

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China. Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China. Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

Electrical Characteristics

| Model | | LF-GIF030YSxxxxH | | | | |
|-----------------------------|-------------------------------------|--|-------|-------|-------|-------|
| Output Voltage | | 33-40V | | | | |
| | Output Current | 550mA | 600mA | 650mA | 700mA | 750mA |
| | Flicker Index (Modulation Depth) | Complies with IEEE 1789-2015 standard | | | | |
| Output | CIE SVM | ≤0.4 | | | | |
| | IEC-Pst | ≤1 | | | | |
| | Current Tolerance | ±5% | | | | |
| | Temperature Drift | ±10% | | | | |
| | Startup Time | <0.5S | | | | |
| | Input Voltage | 220-240Vac (voltage limit: 198-264Vac) | | | | |
| | Input Frequency | 0/50/60Hz | | | | |
| | Input Current | 0.2A max. | | | | |
| | PF | ≥0.9 | | | | |
| | THD | ≤20% | | | | |
| Input | Efficiency | ≥86% ≥86.5% | | ≥87% | | |
| | Inrush Current | ≤24A&144uS | | | | |
| | Loading Quantities | Model | B10 | C10 | B16 | C16 |
| | of Circuit Breaker | Quantity (pcs) | 25 | 41 | 40 | 68 |
| | Leakage Current | ≤0.7mA | | | | |
| | Standby Power Consumption | ≤0.5W | | | | |
| | Open Circuit | <55V | | | | |
| Protection | Short Circuit | Hiccup mode (auto-recovery) | | | | |
| | Open Circuit | If the maximum load is exceeded by a defined internal limit, the LED Driver turns off the LED output. The driver will recover automatically once the overload is eliminated. | | | | |
| | Operating Temperature | -30°C - +45°C | | | | |
| _ | Operating Humidity | 20-90%RH (no condensation) | | | | |
| Environment Descriptions | Storage Temperature/ Humidity | -30°C - 80°C (6 months in Class I environment); 10-90%RH (no condensation) | | | | |
| | Atmospheric Pressure | 86-106kPa | | | | |

Electrical Characteristics

| | Certifications | ENEC, CE, CB, UKCA, SAA, RCM, CCC | | |
|---------------------|--|---|--|--|
| Safety & EMC | Withstanding Voltage | I/P-O/P: 3.75kV&5mA&60S | | |
| | Insulation Resistance | I/P-O/P: >100MΩ@500Vdc | | |
| | Safety Standards | ENEC: EN61347-1: 2015, EN61347-2-13: 2014/A1: 2017, EN62384 2016/A1: 2009 CE-LVD: EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015 CB: IEC61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 UKCA-LVD: EN61347-1: 2015/A1: 2021, EN61347-2-13: 2014/A1: 2017, EN62493: 2015 CCC: GB19510.1-2009, GB19510.14-2009 FCC: PART 15B SAA: AS 61347.2-13: 2018 | | |
| | EMI | CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 UKCA-EMC: EN IEC 55015: 2019/A11: 2020, EN 61547: 2009, EN IEC 61000-3-2: 2019/A1: 2021, EN 61000-3-3: 2013/A2: 2021 CCC: GB/T17743, GB17625.1, GB17625.2 | | |
| | EMS | CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11 CCC: GB/T17626.2, 3, 4, 5 (lightning strike 1kV), 6, 11 | | |
| | IP Rating IP20 | | | |
| Other Parameters | RoHS | RoHS 2.0 (EU) 2015/863 | | |
| | Warranty | 5 years (Tc≤84°C) | | |
| Test Equipment | AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test) Everfine LFA-3000, etc. | | | |
| Test Remark | If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac/50Hz. | | | |

Lifud Technology Co., Ltd.


٢


Electrical Characteristics

Ι


| Additional Remarks | It is recommended that user install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above. |
|-----------------------|--|
| | protection devices in the power supply circuits of light fixtures to ensure electricity safety. 2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished. 3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current. 4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet |

Product Characteristic Curves

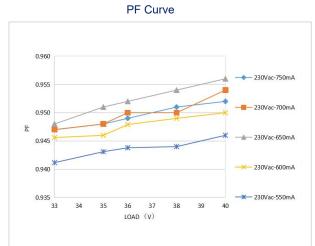

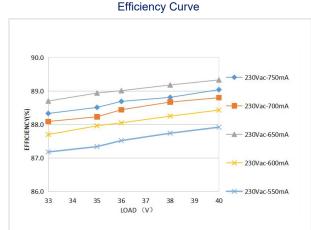

Lifetime Curve

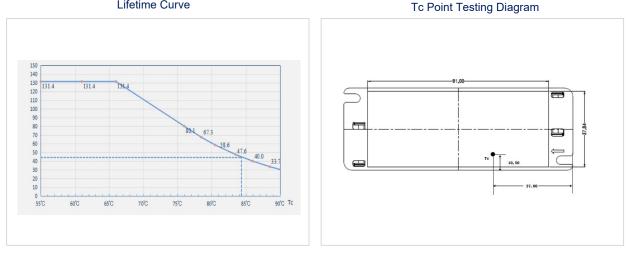

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China. Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China. Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

Product Definitions


Product Terminals

| INPUT | | OUTPUT | | |
|--|--------------------------------|--------|---|--|
| AC-N Input terminal of AC neutral wire | | LED+ | Positive electrode output of LED driver | |
| AC-L | Input terminal of AC live wire | LED- | Negative electrode output of LED driver | |

Structure & Dimensions (unit: mm)

Overall Appearance

| Model | Overall Appearance (L*W*H) | Distance Between 2 Positioning Holes (L) | Diameter of Positioning Hole (D) |
|------------------|----------------------------|---|----------------------------------|
| LF-GIF030YSxxxxH | 115*41*28 mm | 102.7 mm | 4.3 mm |

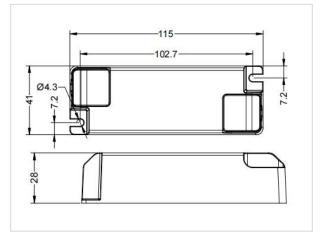

Packaging Specifications

| Model | LF-GIF030YSxxxxH | |
|---------------------------------|---|--|
| Carton Size | 385*285*210mm (L*W*H) | |
| Quantity | 18 pcs/layer; 6 layers/ctn; 108 pcs/ctn | |
| Weight 0.096 kg/pc; 10.6 kg/ctn | | |

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China. Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China. Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

Transportation and Storage

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

• The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.