




Applications

Commercial lighting · indoor office lighting · decorative lighting · residential lighting

Descriptions

LF-GIT040YA is a 40W isolated constant current flicker-free LED driver. Its input voltage ranges from 220-240V and its output voltatge ranges from 9-42V. Its output current is adjustable from 300-1050mA via DIP switch with every 50mA as a step. It is suitable for Class II light fixtures, including integrated track lighting.

Product Model

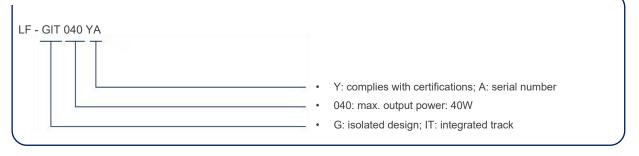

Lifud Technology Co., Ltd.

Electrical Characteristics

Model		LF-GIT040YA										
	Output Voltage	9-42V										
	Output Current			50 500 nA mA				750 800 mA mA		900 mA		1000 1050 mA mA
	Flicker Index	Complies with IEEE 1789-2015 standard										
Output	CIE SVM	≤0.4										
	IEC-Pst	≤1	≤1									
	Current Tolerance	±6%	±6%									
	Temperature Drift	±10%										
	AC Input Voltage	220-240Vac (voltage limit: 198-264Vac)										
	DC Input Voltage	220-240Vdc (voltage limit: 180-264Vdc)										
	Input Frequency	0/50/60Hz										
	Input Current	0.28A max.										
	PF	≥0.87 ≥0.9 ≥0.95										
lanut	THD	≤20%										
Input	Efficiency	≥86.5% ≥88% ≥8		8.5%								
	Inrush Current	≤20A@10	JS									
	Loading Quantities	Model		B10		C10)	B16			C16	
	of Circuit Breaker	Quantity (p	ocs)	25		25		40			40	
	Leakage Current	≤0.7mA										
	Standby Power Consumption	≤0.5W										
Protection	Open Circuit	<55V										
Characteristics Short Circuit Hiccup mode (auto-recovery)												
Environment Descriptions	Operating Temperature	-20°C - +35°C										
	Operating Humidity	20-90%RH (no condensation)										
	Storage Temperature/ Humidity	-30°C - 80°C (6 months in Class I environment); 10-90%RH (no condensation)										
	Atmospheric Pressure	86-106kPa										

Electrical Characteristics

	Certifications	ENEC, CE, CB, RCM, UKCA, EAC			
	Withstand Voltage	I/P-O/P: 3.75kV 5mA 60S			
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc			
Safety & EMC	Safety Standards	ENEC: EN61347-1:2015, EN 61347-2-13:2014/A1:2017, EN 62384: 2016/A1:2009 CE-LVD: EN 61347-2-13:2014/A1:2017, EN 61347-1:2015, EN 62493:2015 UKCA-LVD:EN 61347-1:2015/A1:2021, EN 61347-2-13:2014/A1:2017 EN 62493:2015 RCM:AS 61347.2.13:2018 & AS/NZS 61347.1:2016+A1			
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3			
	EMS	CE-EMC/RCM: EN61000-4-2, 3, 4, 5 (lightning strike 1kV), 6, 11			
	IP Rating	IP20			
Other Parameters	RoHS	RoHS 2.0 (EU) 2015/863			
	Warranty	5 years (Tc≤81°C)			
Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test) Everfine LFA-3000, etc.				
Test Remark	If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac/50Hz.				

Electrical Characteristics

 2. The PC of the fire ratin

 Additional

 Remarks


 light fixture, the LED light should re-code

It is recommended that user install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
 The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
 The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light future is not ach grave the fire ratio.

light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.


4. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current.


Product Characteristic Curves

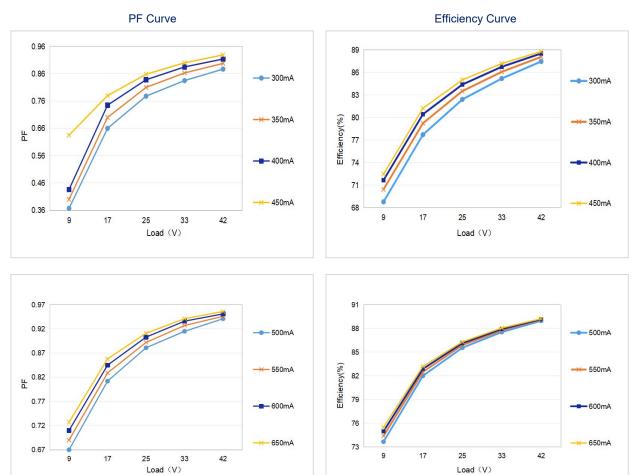


Lifud Technology Co., Ltd.


Product Characteristic Curves

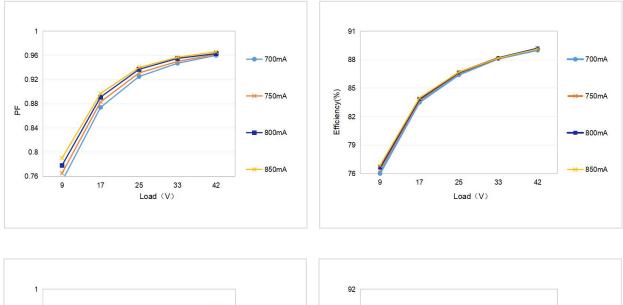


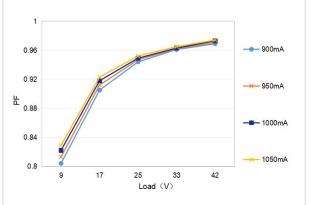

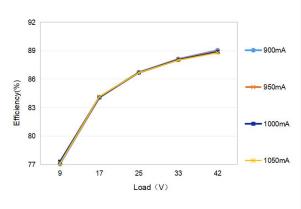

Lifetime Curve

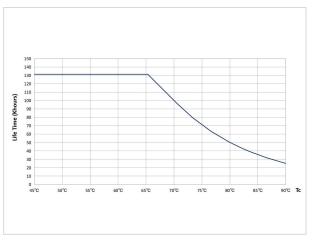

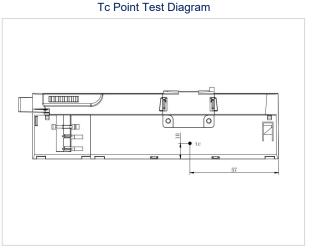

Lifud Technology Co., Ltd.

Product Definitions

Product Terminals

	INPUT	OUTPUT		
AC-L AC live wire input		LED+	Positive electrode output of LED driver	
AC-N	AC neutral wire input	LED-	Negative electrode output of LED driver	

Product DIP Switch

I rated (CC)	1	2	3	4
300mA	-	-	-	-
350mA	-	-	-	ON
400mA	-	-	ON	-
450mA	-	-	ON	ON
500mA	-	ON	-	-
550mA	-	ON	-	ON
600mA	-	ON	ON	-
650mA	-	ON	ON	ON
700mA	ON	-	-	-
750mA	ON	-	-	ON
800mA	ON	-	ON	-
850mA	ON	-	ON	ON
900mA	ON	ON	-	-
950mA	ON	ON	-	ON
1000mA	ON	ON	ON	-
1050mA	ON	ON	ON	ON


Remark: "-": shift OFF

Lifud Technology Co., Ltd.

Product Application Track

Number	Brand	Track Type	Phase Position	
1	Global	XTS 4 & XTSF 4	3P	
2	Eutrac	2510x	3P	
3	Ivela	7501	3P	
4	Unipro	Т32В	3P	
5	Stucchi	9000XX Series	3P	

Diagram of a 4-Wire, 3-Circuit Track

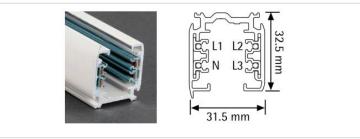


Structure & Dimensions (unit: mm)

Product Dimensions

Model	Overall Appearance (L*W*H)	Distance Between 2 Positioning Holes (L)	Diameter of Positioning Hole (D)
LF-GIT040YA	158.1*42.2*31.1mm (±0.5mm)	26.1mm (±0.2mm)	3.1mm

Structure Diagrams

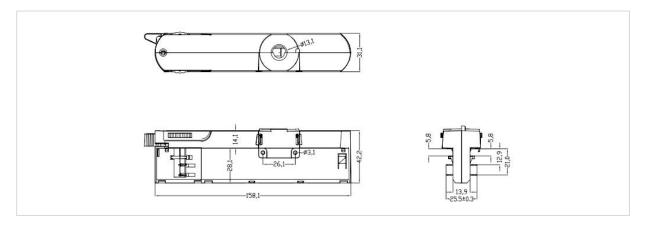

Lifud Technology Co., Ltd.

Packaging Specifications

Model	LF-GIT040YA		
Carton Size	385*285*210mm (L*W*H)		
Quantity	12 pcs/layer; 4 layers/ctn; 48 pcs/ctn		
Weight	$0.12{\pm}5\%$ kg/pc; 7.0 ${\pm}5\%$ kg/ctn		

Transportation & Storage

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

• The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.