

End-product drawing

REV.	DESCRIPTION	DESIGN	DATE
(X1)	NEW DRAWING	PDH	2019/10/10


NOTES:

1. MATERIAL: PA66、BRASS、SILICONE;
2. CERTIFICATION: ROHS/cUL/TUV/SAA/CE;
3. FIRE-PROOT: UL94-V2。
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE TWO ENDS OF THE 2 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A、 MAXIMUM CURRENT-CARRYING CAPACITY: 400V/24A
 B、 TEST VOLTAGE: 2500V
 C、 SUITABLE FOR CABLES CROSS SECTIONS: 0.5-2.5mm²
 D、 OPERATING TEMPERATURE RANGE: -40~+105°C
 E、 PROTECTION CLASS: IP68




2 Pins

Silicone parts




φA	Wire OD
φ11.5	φ9-12mm
φ8.5	φ5-9mm

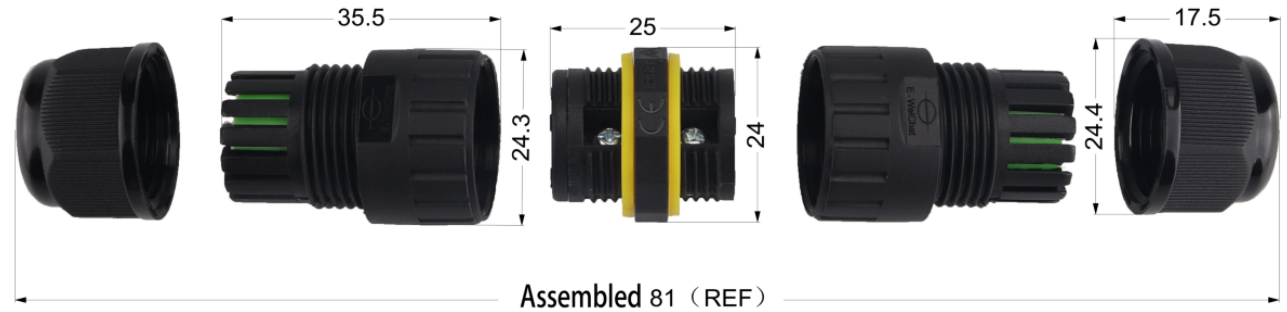

Weight	MEAS	Each carton number	G. W.
26.8g	42*30*34cm	600pcs	16.9Kg

UNLABELED TOLERANCE			
X.	±0.35	X.XX	±0.20
X.X	±0.25	X.XXX	±0.10



UNITS	mm	DRAW	PDH	2019/10/10	PART NO.	EW-M20-2P	FUCON
SCALE	1:1	CHKD			DWG NO	EW-M20-2P	
SHEET	1/1	APPD			TITLE	Waterproof connetor	