

End-product drawing


6	7	8
REV.	DESCRIPTION	DESIGN DATE
(X1)	NEW DRAWING	PDH 2019/10/10

NOTES:

1. MATERIAL: PA66、BRASS、SILICONE;
2. CERTIFICATION: ROHS/cUL/TUV/SAA/CE;
3. FIRE-PROOT: UL94-V2。
4. NO DEFECT IN APPEARANCE;
5. UNITS: mm;
6. CONDUCTION TEST: THE TWO ENDS OF THE 3 CORE JOINTS ARE RESPECTIVELY CONNECTED
7. A、MAXIMUM CURRENT-CARRYING CAPACITY: 400V/24A
 B、TEST VOLTAGE: 2500V
 C、SUITABLE FOR CABLES CROSS SECTIONS: 0.5-2.5mm²
 D、OPERATING TEMPERATURE RANGE: -40~+105°C
 E、PROTECTION CLASS: IP68




3 Pins

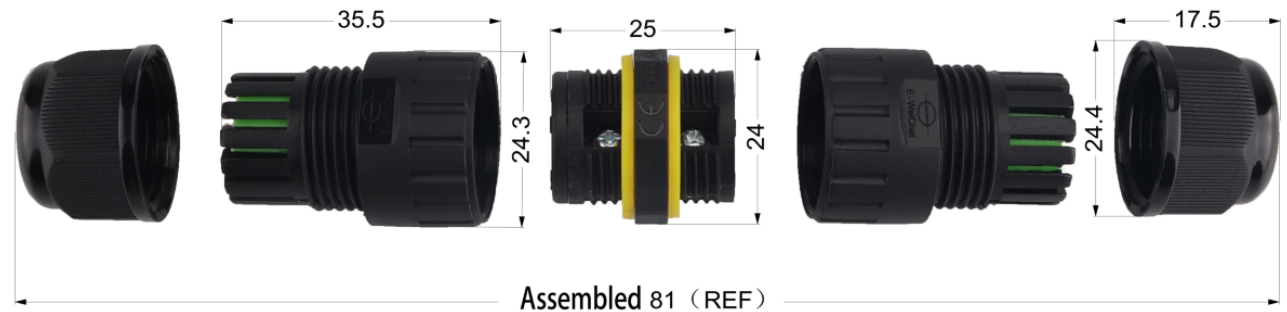

Assembled 81 (REF)


Silicone parts



φA	Wire OD
φ11.5	φ9-12mm
φ8.5	φ5-9mm

Weight	MEAS	Each carton number	G. W.
28g	42*30*34cm	600pcs	17.7Kg

UNLABELED TOLERANCE			
X.	±0.35	X.XX	±0.20
X.X	±0.25	X.XXX	±0.10



UNITS	mm	DRAW	PDH 2019/10/10	PART NO.	EW-M20-3P
SCALE	1:1	CHKD		DWG NO	EW-M20-3P
SHEET	1/1	APPD		TITLE	Waterproof connetor

FUCON