

# PRODUCT DATASHEET

## LVED FP 75/0.3-1.05/IP67 VS10 G2TR LEDV

### FULL PROGRAMMABLE OUTDOOR DRIVER

---

#### AREAS OF APPLICATION

- Street and urban lighting
- Industry
- Suitable for outdoor applications in luminaires
- Suitable for use in outdoor luminaires of protection



---

#### PRODUCT FAMILY FEATURES

- Rated input voltage range 220~240Vac
- Constant power design, output current programming adjustable
- Offline programmable
- 3-in-1 dimmable: 1~10Vdc, PWM, Timer dimming
- Output and Dimming Signal Isolating
- Surge protection: DM 5KV, CM 10KV
- Protections: SCP, OVP, OTP
- IP67 design for indoor and outdoor applications
- Suitable for dry / damp / wet locations
- 5 years warranty

**TECHNICAL DATA**

**General**

<b>Model Name</b>	LVED FP 75/0.3-1.05/IP67 VS10 G2TR LEDV		
<b>Driver Basic Code</b>	AC56104	<b>Product Category</b>	0 - 10V
<b>Region</b>	EU	<b>Product Installation Type &amp; Location</b>	Independent
<b>Certification and Report</b>	CE (CE LVD, EMC, ROHS, Reach), ENEC	<b>Glow Wire Test Temperature ACC / IEC 60695-2-11</b>	-
<b>Indoor / Outdoor</b>	Outdoor	<b>Contains Dangerous Good (Yes / No, If yes, list out)</b>	Yes, with Sb <sub>2</sub> O <sub>3</sub> , BFRs, Lead
<b>IP Level</b>	IP67	<b>Remote Control</b>	No
<b>Protection Class</b>	Class I	<b>Smell</b>	No noticeable smell
<b>Other Requirements</b>	-		

**Electrical Data**

Requirement	Condition	Rated Value	Tolerance	Unit
Rated Input Voltage		220-240		VAC
Input Voltage Range		176-305		VAC
DC Input Voltage		/		VDC
Input Current		700	max	mA
Product Input Power		90	max	W
Stand-by Power		/		W
No Load Power		/		W
Rated Frequency		50 / 60	50 / 60	Hz
Start Time	240Vac, full load	1		s
Power Factor (PF)	220-240Vac, 50Hz, 70%-100% load	>0.95		
Displacement factor (DF)	Rated voltage	/		
Total harmonic distortion (THD)	Max Load	10	Max	%

Output Current	Steady state	700 - 1050		mA
Output Voltage		54 - 108		v
Auxiliary Output		/		
Output current/voltage tolerance	Full load and min load	±5		%
Output Power	Steady State	75	Max	W
Driver Efficiency	Full load	90	Min	%
Output ripple current percentage	Full load( $(I_{max} - I_{min}) / (I_{max} + I_{min}) * 100\%$ )	15	Max	%
Open circuit voltage(OCV)		150	Max	v
Open circuit frequency		/		KHz
Output frequency (only for ballast product)		/		KHz
PST/SVM		/		
Noise Level	Test at 20cm with noise testing equipment	/		dB
Dimming method and range	For all level load	10% - 100%		
Dimming input isolation or not(for Dali and 0-10v driver)			Yes	
Dimming Interface Protection(for Dali and 0-10v driver)			No	
Dim to off (for 0-10v driver)			Yes	
Surge Voltage capability	General requirement has to fulfill criteria A and B Otherwise, highlight it specially		L/N -PE: 10kV L/N: 6kV	
Voltage dip	General requirement has to fulfill criteria A and B Otherwise, highlight it specially		Pass A	
Hi-Pot/Insulation resistance (For Production line control only)	Insulation Resistance: Input-Output, Input-PE, Output-PE, 500Vdc/60s/25°C	Hi-Pot: Input-Output 3750Vac/Input-Ground 1500Vac Output-Ground 1300Vac/Input-Dimming 3750Vac/Dim-Ground 500Vac; Insulation Resistance: 10MΩ(min)		
Over Temperature Protection		Yes. The driver will turn off the output current when the case temperature exceeds 95°C (±5°C), and will not return to normal even if over temperature condition is removed. By reconfiguring the drivers by software, the over temperature shutdown function can be released and normal output can be restored.		
Output circuit short protection			Yes	
Output circuit open protection			No	
Output circuit over voltage Protection			Yes	

**Lifetime and Application Environment**


Requirement	Condition	Rated Value	Unit
Declared lifetime	Full load with max Tc	50000h	hrs
Ambient Temperature Range (Ta)		-40 ~ + 55	°C
Tc temperature of Product under Ta max	max	90	°C
Storage Temperature Range (Ta)		-40 ~ + 85	°C
Max. Tc temperature of driver in fault condition		<110	°C
Operating humidity		10 ~ 93%	%
Storage humidity	Product	10 ~ 93%	%
Switching Cycle	0.5min on /0.5min off cycle	25000	Times
Warranty year	24hrs / day	5	Years

**Smart Features**

Requirement	Condition	Rated Value	/
Compability with 3rd application		Product with Bluetooth. APP type: Smart +/- Google Speaker/ Amazon Speaker/ Apple Homekit  Product with Zigbee APP type: Philip hue/ Amazon Speaker/ Google Speaker, etc  Product with WiFi APP type: Smart + WiFi/ Google Speaker/ Amazon Speaker Combability with Gen1 and Gen2 WiFi remote controller  Operation system: IOS/ Android	
Mini wireless control distance		Provisioning distance: Controller-to-Lamp distance: Mesh distance:	m

Note: After triggering OTP, there is a flashing light phenomenon on the input switch


Dimensions & Weight

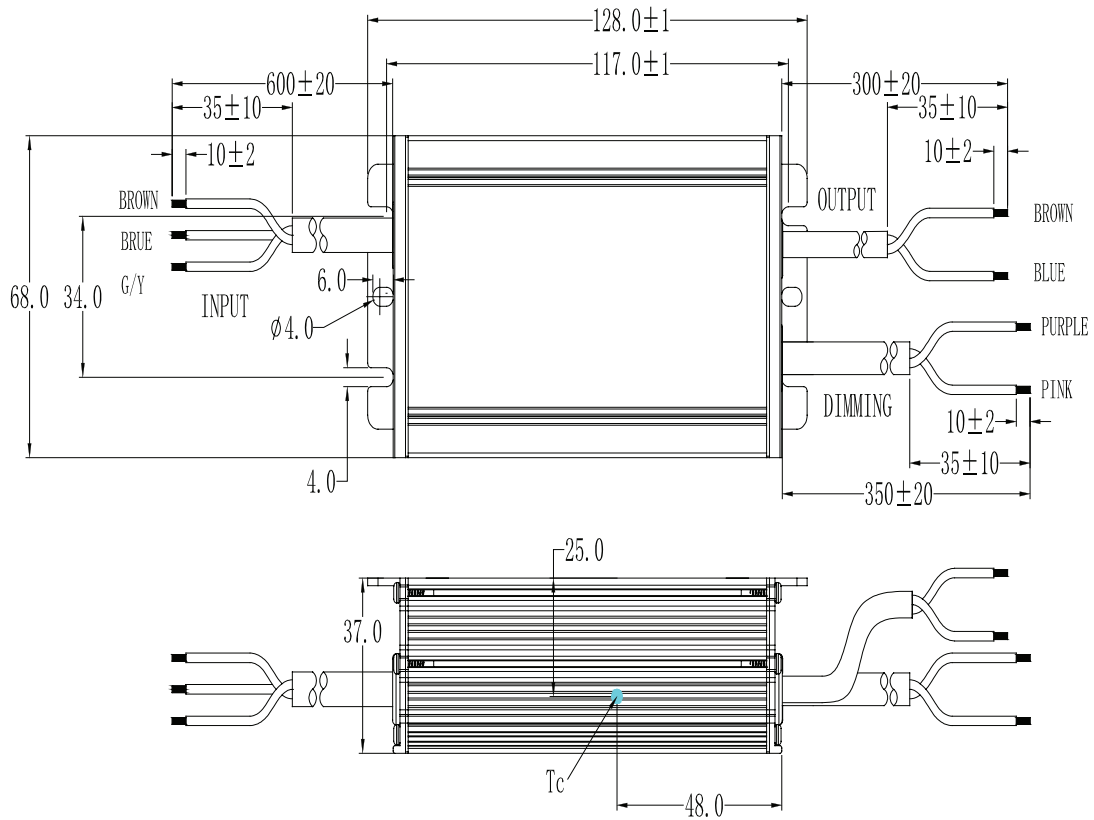


<b>Length</b>	128 mm	<b>Weight</b>	550 / $\pm 50$ / g
<b>Width</b>	68 mm	<b>Diameter</b>	/ mm
<b>Height</b>	37 mm	<b>Other requirements</b>	/
<b>Cable Length &amp; Size of LED Driver Output</b>	CCC+VDE H05RN-F 3*1.0 mm <sup>2</sup> L=100 $\pm$ 20mm / $\pm$ 50mm		
<b>Cable Length &amp; Size of LED Driver Input</b>	CCC+VDE H05RN-F 2*1.0 mm <sup>2</sup> L=100 $\pm$ 20mm / $\pm$ 50mm		

Curve

Typical THD V.S load

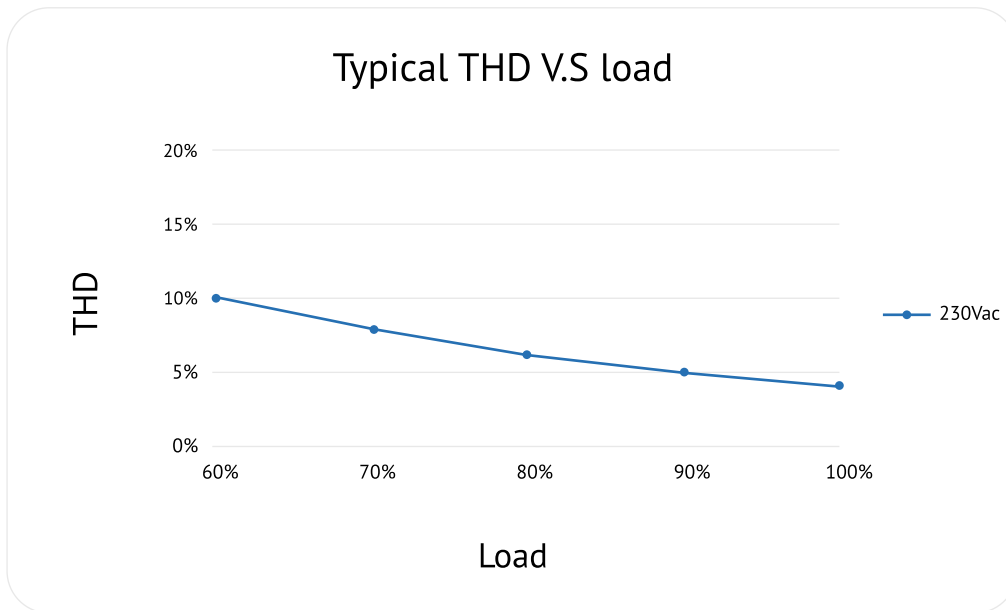


Typical Efficiency V.S load

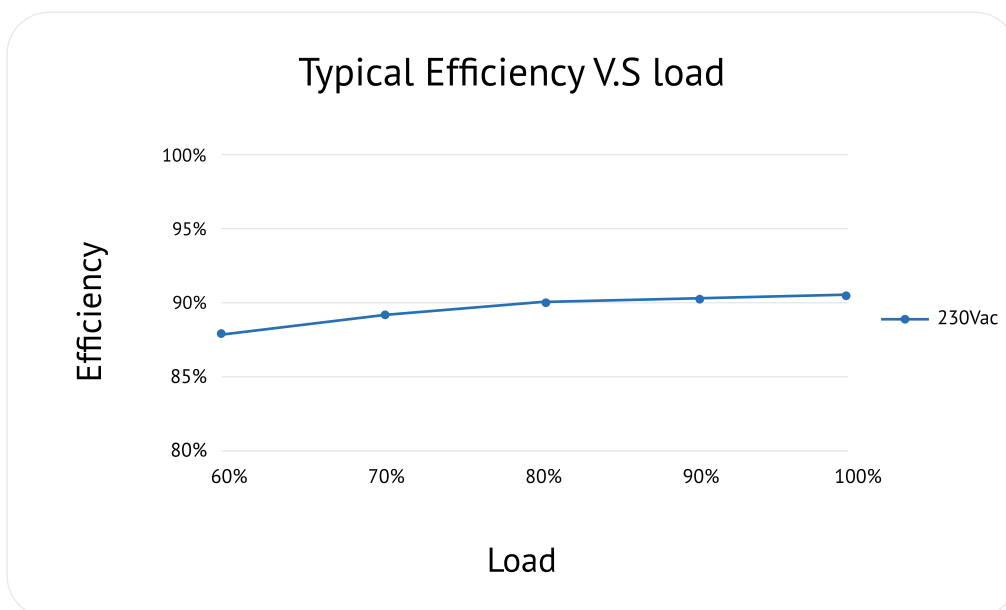


Curve

Typical Power factor V.S load

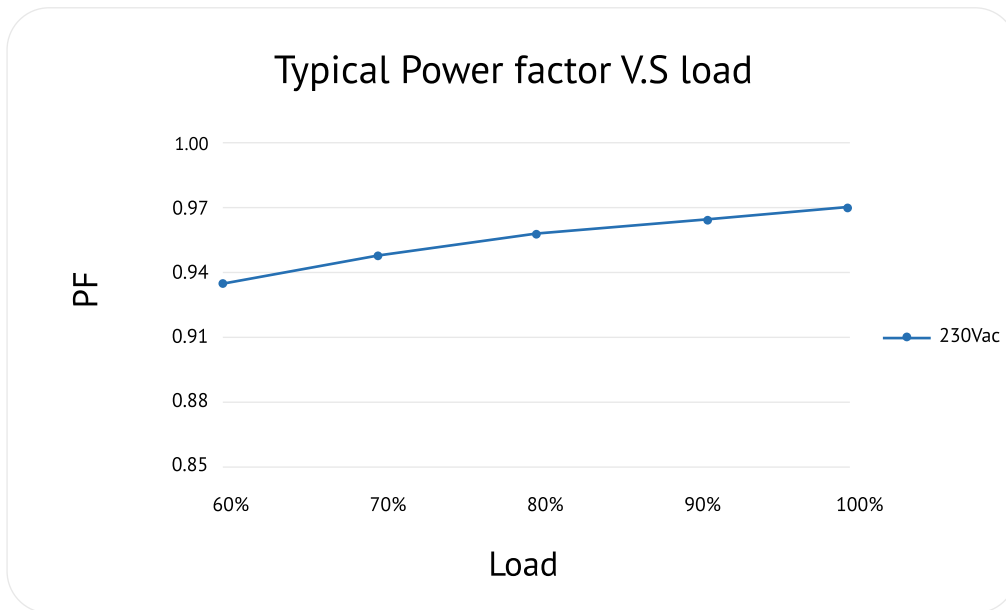

Typical Lifetime V.S Tc

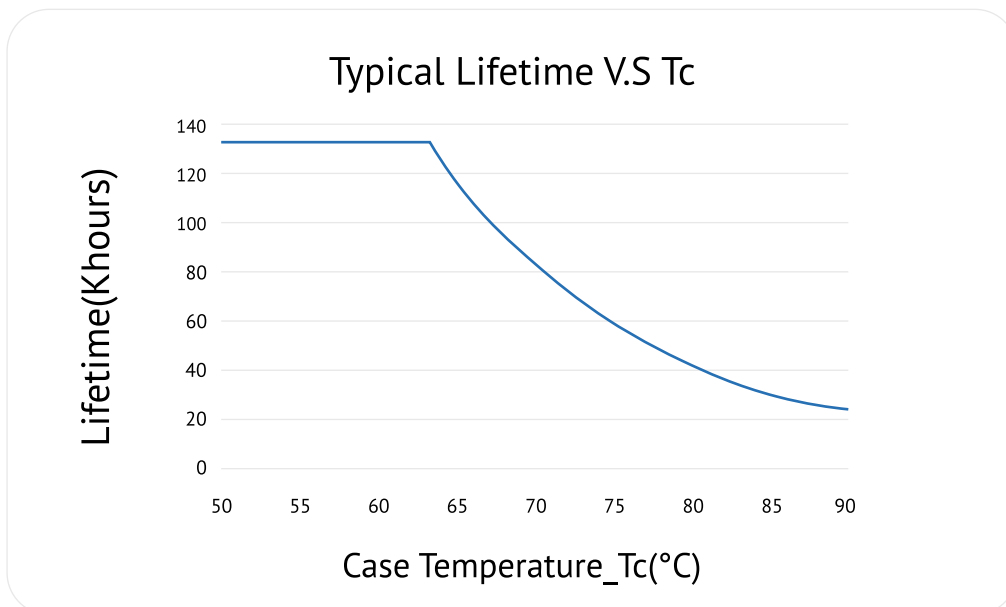

Curve

Operating Window

