



PAR Meter PG200N

Handheld Spectrometer


Specification

| Spectrum | | |
|---|---|---------------------------|
| Sensor | CMOS Linear Image Sensor | |
| Illuminance meter class | Directional response conforms to JIS C 1609-1:2006 for General Class AA. Directional response conforms to DIN 5032 Part 7 Class B. | |
| Wavelength Range | 350 to 800 nm | |
| Wavelength Data Increment | 1 nm | |
| Spectral Bandwidth | Approximately 9 nm (Half Bandwidth) | |
| Wavelength Reproducibility | $\pm 1 \text{ nm}^{*1}$ | |
| Measurement Range | 1. 70 ~ 150,000 lx 2. 0.5~1,000 W/m ² (Irradiance) 3. 1~3,000 $\mu\text{mol}/(\text{m}^2 \cdot \text{s})$ (PPFD) | |
| Illuminance Accuracy | Illuminant A @ 2,856 K at 20,000 lx ^{*2} | $\pm 5\%$ |
| Illuminance Repeatability (2 σ) | | 0.2% |
| Color Accuracy | | x y : ± 0.0025 |
| Color Repeatability (2 σ) | | x y : 0.0005 |
| CCT Accuracy | | $\pm 2\%$ |
| CRI Accuracy @ Ra | | $\pm 1.5\%$ |
| Stray Light | | -25 dB max. ^{*3} |
| Integration Time Range | 100 μs to 1,000 ms | |

| Digital Resolution | 16 bits |
|------------------------|---|
| Feature | |
| Capture Function | One time / Continuous |
| Dark Mode | Auto Dark |
| Operation Mode | Standalone Mode / Bluetooth Mode ^{*4} / USB Mode (MSC Mode ^{*5} +PC connection) |
| Integration Mode | Auto/Manual |
| G sensor mode | Axial Displacement (x,y) |
| Measuring Modes | 1. Basic Mode |
| | 2. Spectrum Mode |
| | 3. PPF Mode |
| | 4. PPF Spectrum Mode (Including reference spectrum - Chlorophyll A, Chlorophyll B, Beta-carotene, Phytochrome A red, Phytochrome A far red) |
| | 5. CIE 1931/1976 Chromaticity Mode |
| | 6. Logging Mode |
| | 7. Grid Mode |
| | 8. Compare Mode |
| | 9. Browser Mode |
| | 10. Option Mode |
| Measuring Capabilities | 1. Illuminance (LUX)/Foot Candle (fc) |
| | 2. Correlated Color Temperature (CCT) |
| | 3. CIE Chromaticity Coordinates (1) CIE 1931 x,y Coordinates (2) CIE 1976 u',v' Coordinates |
| | 4. Δx , Δy , $\Delta u'$, $\Delta v'$ |
| | 5. Delta uv (Duv) |
| | 6. Dominant Wavelength (λ_d) |
| | 7. Excitation Purity |
| | 8. Color Rendering Index (CRI, Ra)/R1 to R15 |
| | 9. Spectral Power Distribution (SPD) |
| | 10. Peak Wavelength (λ_p) |
| | 11. Peak Wavelength Value (λ_{pV}) |
| | 12. Intergration Time (I-Time) |
| | 13. Irradiance (380nm~780nm) |

| | |
|----------------------------------|---|
| | <p>14. Photosynthetically Active Radiation (PAR)</p> <p>(1) PFD(400nm~700nm)</p> <p>(2) PFD-R(600nm~700nm)</p> <p>(3) PFD-G(500nm~600nm)</p> <p>(4) PFD-B(400nm~500nm)</p> <p>(5) PFD(380nm~780nm)</p> <p>(6) PFD-UV(350nm~400nm)</p> <p>(7) PFD-FR(700nm~800nm)</p> <p>(8) PFD-B:G Ratio (400~500nm:500~600nm)</p> <p>(9) PFD-R:FR Ratio (600~700nm:700~800nm)</p> |
| | 15. Phytochrome Photostationary State(PSS) |
| | 16. Temperature (°C) ^{*7} |
| | 17. Relative Humidity (% RH) ^{*7} |
| System Configurations | |
| Display | 4.3" 800X480 Capacitive Touch LCD |
| Waterproof level | IP66 ^{*6} |
| Max. Files | ≅ 68,000 Files @ 8GB SD Card (Excel + JPG) |
| Battery Operation Time | ≤ 5 hours / Fully Charged |
| Power | Adapter; 3200 mAh (3.7V Rechargeable Li-ion Battery) |
| Data Output Interface | MicroSD Card (SD2.0,SDHC / up to 32G) / Type C / Bluetooth 3.0 and 4.0 compatible with iOS and Android |
| Data Format | Compatible Excel / JPG |
| Dimensions | 190 x 81.7 x 29.5 mm (H x W x D) |
| Weight (with Battery) | 280 g ± 10 g |
| Operating Temperature / Humidity | 0 to 35 °C, relative humidity 70% or less without condensation |
| Storage Temperature / Humidity | -10 to 40 °C, relative humidity 70% or less without condensation |
| Display languages | English / Traditional Chinese / Simplified Chinese / Japanese / Spanish / German / French / Italian / Russian |
| PC Software | uSPECTRUM |

Cosine Correction

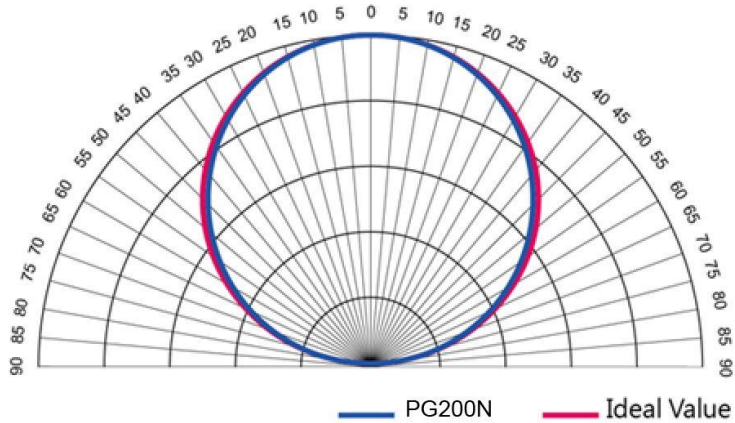

- *1 : Input source must be a stable light source.
- *2 : Temperature $23\pm 2^{\circ}\text{C}$ and relative humidity 50% or less.
- *3 : Input the 550nm monochromatic light and measure the stray light ratio at $550\text{nm} \pm 40\text{nm}$.
- *4 : It can be connected to mobile phones and tablets.
- *5 : MSC- Mass Storage Class.
- *6 : Only sensor, not the whole body
- *7 : It has to be used with "PG200N Thermo-Hygro cable" to do the measurement.

The company reserves the right to change product specifications at any time without prior notice.