



PRODUCT SPECIFICATION

产品规格书

Part Name / 产品型号	Plastic Screw Protective Vent
Voir P/N / 沃瑞编码	VV-POVM06022-D38G
Customer / 客户型号	
Customer P/N / 客户料号	
Issue Date / 发布日期	2016-10-06

Checked / 审核		Prepared / 制作	
Li Zuo Jun		Chen Ming	
Customer Approve / 客户核准			
—			
—			

产品构件	
Body Material	PC
Membrane	e-PTFE
Body Material	Silicone Ring
产品性能	
Airflow A/P	160ml/min ; $\Delta p=70\text{mbar}$
WIP	$>40\text{Kpa}$
Temperature Range	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
IP Rate	IP67
Benefit for Outdoor Equipment	

1. Lower the tension for the housing and rapidly balancing the pressure.
2. The oleophobic and hydrophobic e-PTFE membrane is chemically inert and UV resistant.
3. Easy installation and maintenance, which just screws into the housing. The silicone ring seals the enclosure to keep the good air tightness. Safe and easy handling.




Specification: VV-POVM06022-C38G

PO/FVM06 is a screw vent plug made of PC with e-PTFE porous membrane inserted, whose screw pitch is standard M05*0.8mm. It is waterproof, gas permeable, resisting UV and salt fog. Through tests, it is proved that it reaches IP68. It gets ROHS approval and widely used around the world.


Application

It can be applied to industrial dust collector, chemicals packing industry, bleacher, household commodity, LED, telecommunication equipment, solar equipment and automotive industry. This product cannot be applied to highly corrosive or acid-based environment.

Practical Principle

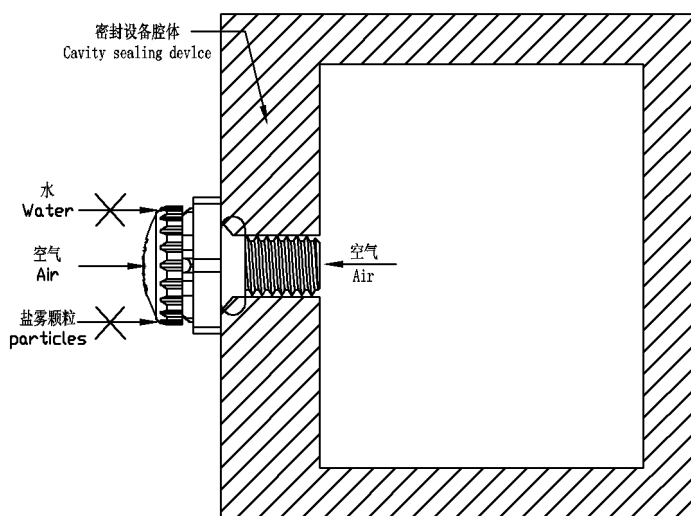

Detailed Spec.

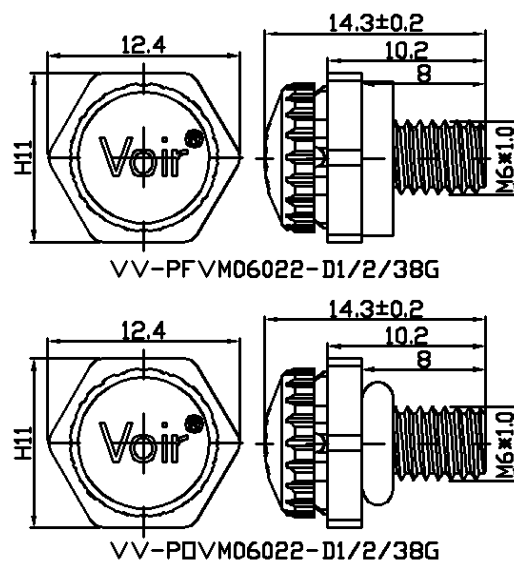


M6 series items as below:

Item	Features
VV-POVM06022-C18G	O-RING /GREY
VV-POVM06022-C28G	O-RING /WHITE
VV-POVM06022-C38G	O-RING /BLACK

Item	Features
VV-PFVM06022-C18G	FLAT-RING/GREY
VV-PFVM06022-C28G	FLAT-RING/WHITE
VV-PFVM06022-C38G	FLAT-RING/BLACK

POV/FM06 Pressure flow chart:

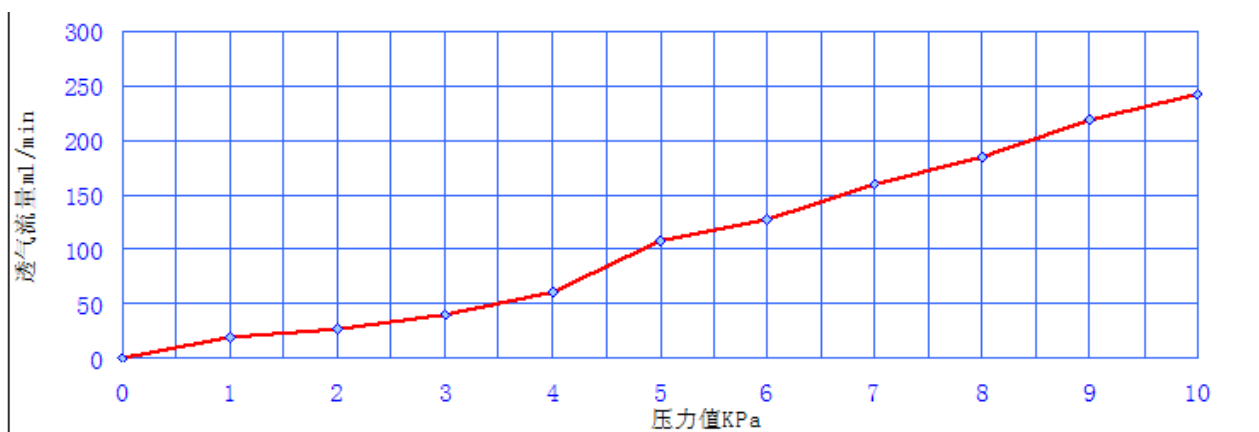


Installation Instruction




Target-oriented sleeve



Put in the sleeve

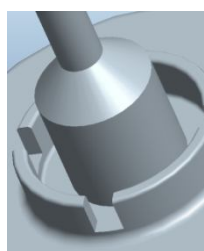


Rotate the sleeve

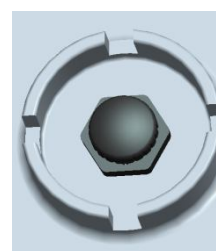


The surface of the shell after installation

Installation suggestion

Specification



suggestion1



suggestion2

Item	material	Spec./mm	Property
VV-PO/FVM06 022-C1/2/38 G	PC	Wench Size: H11 Total Length: 14.3 Screw Length: 8	160ml/min; $\Delta p=70\text{mbar}$

Installation Suggestion :

- 1.H-Thickness of the housing; ϕ -diameter of the straight hole. Suggest installation torque value $\leq 1.03\text{N/m}$
2. When the housing thickness is $>3\text{mm}$, it is suggested punching M6*1.0 threaded hole and use silicone O-ring to seal the entrance. Please refer to Suggestion 1
3. When the housing thickness is $\leq 3\text{mm}$, it is suggested punching $\phi 6.2$ straight hole and lock with nut. Flat silicone ring would seal the entrance. Please refer to Suggestion 2

Customization: VoirTech's protective vents can be customized to match your products in spec., color, property and even provide specific solution. For more information, please contact us.

Voir 惠州市沃瑞科技有限公司
Huizhou Voir Science & Technology Co., Ltd
地址: 广东省惠州市仲恺高新区54号小区和畅东4路
网址: www.voir-tech.com.cn
电话: +86 400-6136683 传真: +86 752-5310696

ADD: Hechang Road East 4 NO. 54 Area, Zhongkai
New and High-tech Industries Development
Zone, Huizhou City Guangdong Province, China
Http: www.voir-tech.com.cn
TEL: +86 400-6136683 FAX: +86 752-5310696