

PRODUCT PHOTO



FEATURES



COLOR OPTIONS

- 2700K
- 3000K
- 4000K
- 5000K
- 5700K
- 6500K
- 10000K
- RED
- GREEN
- BLUE
- AMBER



SPECIFICATIONS

Operating Temperature:	30 ~+60°C
Storage Temperature:	-30 ~+60°C
LED Type:	2835 SMD
Input Voltage (DC):	12V
Power:	0.72W
Body Material:	Bottom: ABS Optic: PC
Finishing:	Ultrasonic Welding
Adhesive Tape Brand:	Orafol
Quantity in Strip:	50pcs / Strip

PHOTOMETRY




DIMENSIONS




Anti-Oxidation
Tin-coated Copper Wire

CUSTOMIZING CABLE DISTANCE

Strip Size ~ 7.60m (50pcs)

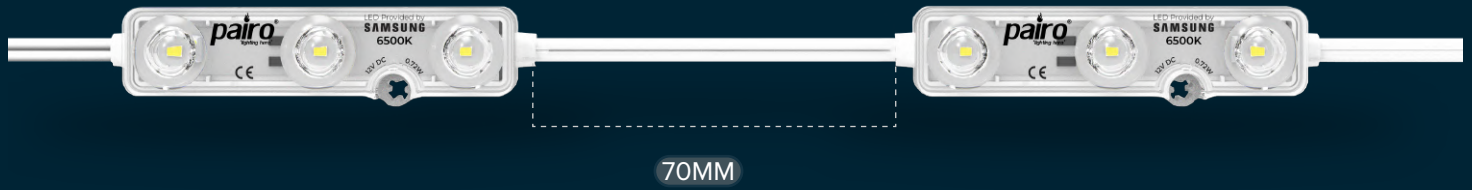

POWER SUPPLY CONNECTION

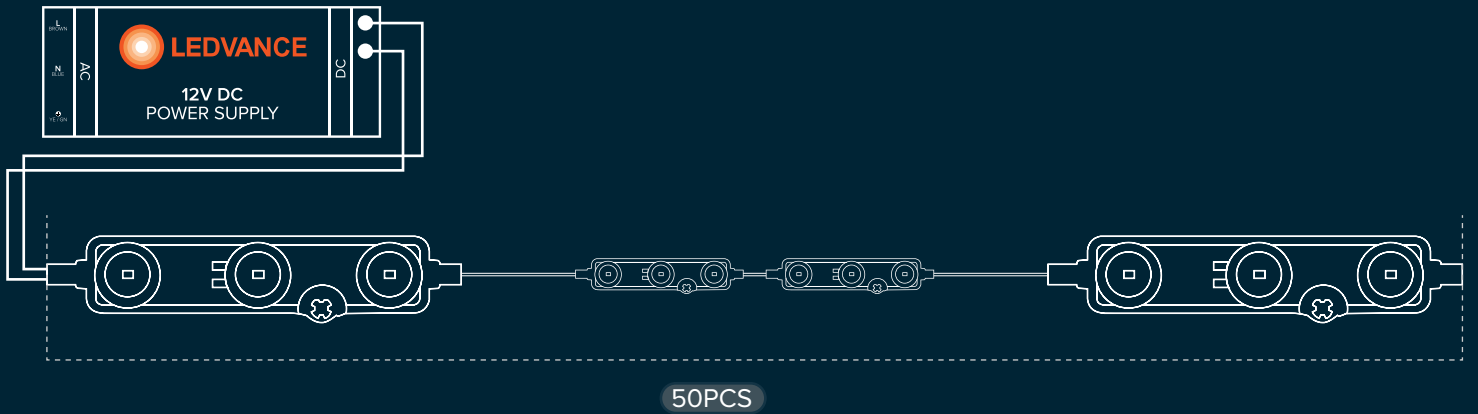

ORDERING INFORMATION

CONSTANT VOLTAGE 12V-0.72W

Order Code	Color	Lumen	Lumen/Watt
PSM03SA072027	2700K	67	93
PSM03SA072030	3000K	69	96
PSM03SA072040	4000K	73	101
PSM03SA072050	5000K	74	103
PSM03SA072057	5700K	74	103
PSM03SA072065	6500K	74	103
PSM03SA072100	10000K	74	103

CONSTANT VOLTAGE 12V-0.72W COLOR

Order Code	Color	Wavelength(nm)
PSM03SA072RED	RED	615-625
PSM03SA072GRN	GREEN	585-595
PSM03SA072BLU	BLUE	450-460
PSM03SA072AMB	AMBER	600-610

CODING INFORMATION

P SM 03 SA 072 027

- Kelvin: 027: 2700K /... / 100: 10.000K
- Power: 072: 0,72W /... / 150: 1,50W
- LED Brand: SA: Samsung, NI: Nichia, SE: Seoul etc.
- LED Qty: 3
- Family Name: Signage Module
- Brand Name: Païro