





# Datasheet

## **CertaDrive G2**

## CertaDrive 30W 0.7A 42V I 230V

## 9290 014 14280

#### Affordable and reliable LED Drivers

Affordable LED Driver range offering Philips reliability. The CertaDrive range is compatible with COB and mid-power LEDs from any LED manufacturer.

#### **Benefits**

- Driver design based on Philips experience and knowledge of conventional fluorescent and HID technologies
- Various power wattage Drivers that are related to the lumen packages/applications
- Fixed output Drivers
- Independent-version housing design for stand-alone installations

#### Features

- High reliability
- Luminaire design flexibility to keep stable/constant
- Lumen output and light quality levels
- Fast Time to Market
- One supplier for professional general lighting LED Drivers
- Affordable LED Drivers

#### Application

- Public buildings (airports, cinemas, theaters, exhibition halls)
- Retail (supermarkets, shops)
- Office

## Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220240	V <sub>ac</sub>	Performance range
Rated input voltage	230	V <sub>ac</sub>	
Rated input frequency range	5060	Hz	Performance range
Rated input current	0.15	Α	@ rated output power @ rated input voltage
Rated input power	33	w	@ rated output power @ rated input voltage
Power factor	0.9		@ rated output power @ rated input voltage
Total harmonic distortion	20	%	@ rated output power @ rated input voltage
Efficiency	89	%	@ rated output power @ rated input voltage
Input voltage AC range	198264	V <sub>ac</sub>	Operational range
Input frequency AC range	4563	Hz	Operational range
Isolation input to output	SELV		

## Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	3042	V <sub>dc</sub>	
Output voltage max.	60	V	Maximum output voltage (rms)
Output current	0.7	A	
Output current tolerance ±	8	%	
Output current ripple LF	≤ 30	%	Ripple = peak / average, < 3kHz
Output power	2130	w	

## Electrical data controls input

Specification item	Value	Unit	Condition
Control method	Fixed		

## Wiring and Connections

Specification item	Value	Unit	Туре
Input wire cross-section	0.51.5 / 2016	mm <sup>2</sup> / AWG	WAGO250 (pitch 3.5 mm), solid / stranded wire
Input wire strip length	8.59.5	mm	
Output wire cross-section	0.51.5 / 2016	mm <sup>2</sup> / AWG	WAGO250 (pitch 3.5 mm), solid / stranded wire
Output wire strip length	8.59.5	mm	
Maximum cable length	0.6	m	Total length of wiring including LED module, one way

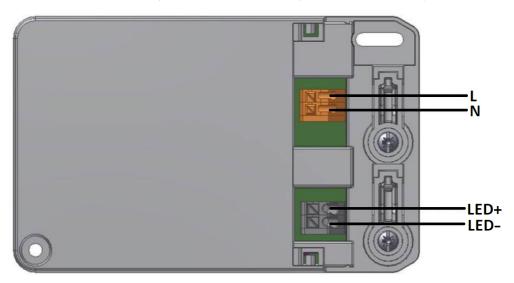



## Insulation

Insulation per IEC61347-1	Input	Output
Input		SELV
Output	SELV	

## Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	108	mm	
Mounting hole distance (A2)	92.9	mm	
Width (B1)	68	mm	
Width (B2)	56.1	mm	
Height (C1)	32	mm	
Mounting hole diameter (D1)	3.6	mm	
Weight	120	gram	

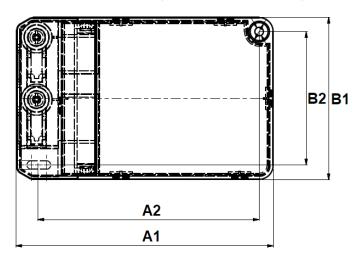




## Logistical data

Specification item	Value
Product name	CertaDrive 30W 0.7A 42V I 230V
EOC	694793913317800
Logistic code 12NC	9290 014 14280
EAN1 (GTIN)	6947939133178
EAN3 (box)	6947939133185
Pieces per box	40

## Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20+50	°C	Higher ambient temperature allowed as long as Tcase-max is not
			exceeded
Tcase-max	80	°C	Maximum temperature measured at T <sub>case</sub> -point
Tcase-life	70	°C	Measured at T <sub>case</sub> -point
Maximum housing temperature	130	°C	In case of a failure, inherent by design
Relative humidity	1090	%	Non-condensing

#### Lifetime

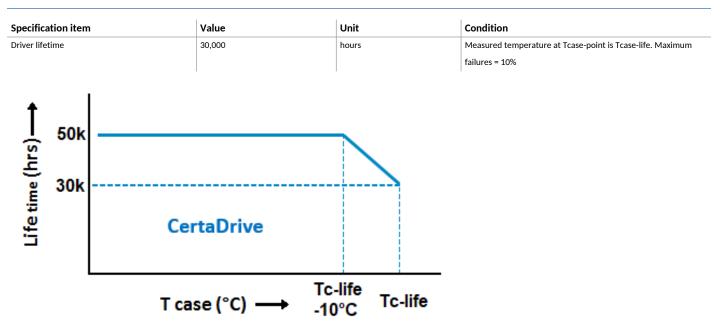

## Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25+85	°C	
Relative humidity	595	%	Non-condensing

## Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	No	700 mA	
LED Module Temperature Protection (MTP)	No		
Constant Light Output (CLO)	No		
DC emergency (DCemDim)	No		

#### Features

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	No	
Suitable for fixtures with protection class	I and II	per IEC60598

#### Inrush current

pecification item	Value	Unit		Condition
rush current I <sub>peak</sub>	4.8	A		Input voltage 230V
rush current T <sub>width</sub>	60	μs		Input voltage 230V, measured at 50% I <sub>peak</sub>
ivers / MCB 16A type B	≤ 40	pcs		Indicative value
		МСВ	Rating	Relative number of LED drivers
T /\		В	4A	25%
		В	6A	40%
lucati /		В	10A	63%
Ipeak Twidth		В	13A	81%
·width		В	16A	100% (stated in datasheet)
		В	20A	125%
		В	25A	156%
		В	32A	200%
		В	40A	250%
		С	4A	42%
		С	6A	63%
		С	10A	104%
		С	13A	135%
		С	16A	170%
		С	20A	208%

## Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.7	mA peak	Acc. IEC61347-1. LED module contribution not included

c c

С

25A

32A

40A

260% 340%

415%

## Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	Acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	2	kV	Acc. IEC61000-4-5. 12 Ohm 1.2/50us,8/20us

## **Application Info**


Specification item	Value
Approval marks	BIS / CCC / CE / ENEC / F-mark / RCM / SELV
Ingress Protection classification (IP)	20
Application	Indoor Point
Mounting Type	Built-in

#### Graphs


## Operating window




## Power factor versus output power



## Efficiency versus output power







©2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved. UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: February 15, 2021 v2

www.philips.com/oem